


OWL SW1.7 CL-320

Digital & rugged high sensitivity SWIR camera

320 x 256 • 25/30/50/60Hz • 14 bit • TEC • Vis-SWIR

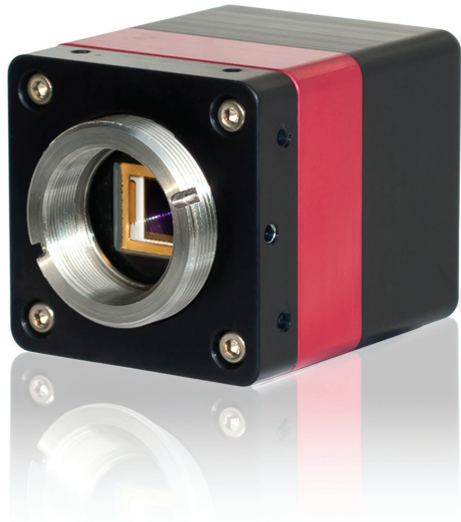

DATA SHEET

Key Features and Benefits

- ✓ **SWIR technology.** Enables high sensitivity imaging from 0.9 μ m to 1.7 μ m
- ✓ **Optional Visible extention.** Enables high sensitivity imaging from 0.4 μ m to 1.7 μ m
- ✓ **14 bit CameraLink output.** Enables high speed digital video with intelligent auto AGC
- ✓ **On-board Automated Gain Control (AGC).** Enables clear video in all light conditions
- ✓ **On-board intelligent 3 point NUC.** Enables highest quality images
- ✓ **Easy control of camera parameters.** Enables control of Exposure, Gamma and intelligent AGC
- ✓ **500ns minimum exposure.** Ideal for active imaging applications
- ✓ **Ultra compact, Low power (< 5W).** Ideal for hand-held, mobile or airborne systems
- ✓ **Rugged, No fan.** Enables integration into UAV, handheld or any Electro-Optic systems



● ● ● ● ● ● ● ● Capturing Tomorrow

Specification for OWL SW1.7 CL-320

FPA Specification


Sensor	Alcatel-Thales III-V Lab
Sensor Type	InGaAs PIN-Photodiode
Active Pixel	320 x 256
Pixel Pitch	30µm x 30µm
Active Area	9.6mm x 7.68mm
Spectral response	0.9µm to 1.7µm or 0.4µm to 1.7µm
Noise (RMS)	<150 electrons
Quantum Efficiency	>70% @ 1.5µm
Pixel Operability	>99.5%

Camera Specification

Digital Output Format	14 bit CameraLink (Base Configuration)
Exposure time	500ns to 1/frame rate
Frame Rate	25Hz, 30Hz, 50Hz or 60Hz
Optical Interface	C mount (selection of SWIR lens available)
Camera Setup / Control	CamerLink
Dynamic Range	14 bit
Trigger interface	Trigger IN and OUT - TTL compatible
Power supply	12V DC ±10%
TE Cooling	ON / OFF
Image Corection	3 point NUC (offset, Gain & Dark Current) + pixel correction
Functions controlled by serial communication	Exposure, intelligent AGC, Non Uniformity Correction, Gamma, Pk/Av, TEC, ROI
Camera Power Consumption ¹	< 5W without TEC
Operating Case Temperature	-20°C to +55°C
Storage Temperature	-30°C to +60°C
Dimensions & Weight	50mm x 50mm x 82mm / 285g

Raptor Photonics Limited reserves the right to change this document at any time without notice and disclaims liability for editorial, pictorial or typographical errors.
Note 1: Up to additional 5W with TEC ON

Quantum Efficiency

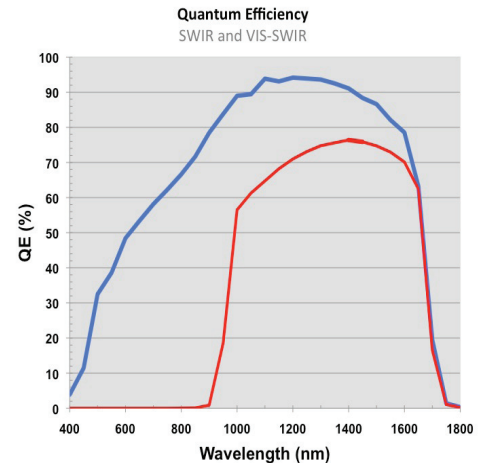


Sample Applications

Raptor's OWL SWIR camera cores are ideally suited for cutting edge application such as:

- 1.55µm laser line detection
- Range finding
- Active Imaging
- Imaging through fog
- Vision enhancement
- Semiconductor Inspection
- Astronomy

Dimensions

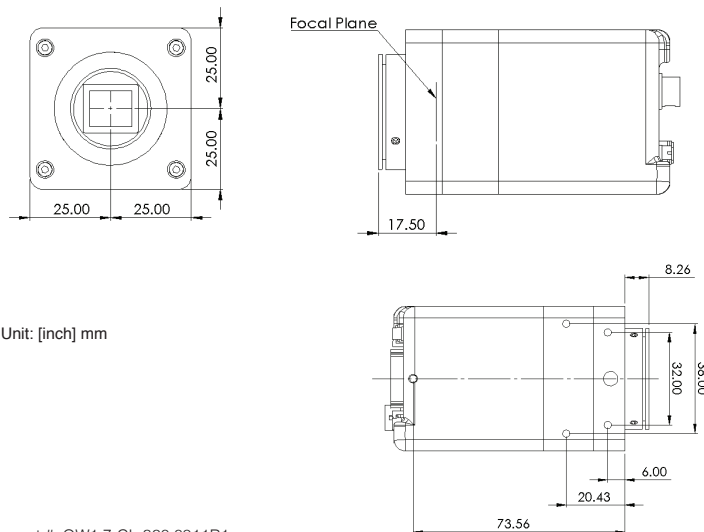

Ordering Information

Camera

OWL SWIR digital camera	OW1.7-CL-320
OWL Visible-SWIR Digital camera	OW1.7-VS-CL-320
OWL Power Supply Cable	RPL-HR4-CBL-B

Optional Accessories

Epix base CL card	RPL-EPIX-EB1
Epix base notebook CL card	RPL-EPIX-ECB1-54
Epix Xcap Ltd software	RPL-XCAP-LTD
CameraLink Cable, 2m ¹	RPL-CL-CBL-2M
Optical SWIR lenses ²	RPL-xx-xxxx

Note: ¹ Longer CL cable available

² Please contact us to check our range of lenses

Document #: OW1.7-CL-320 0911R1

Headquarters

Willowbank Business Park
Larne, Co Antrim
BT40 2SF
Northern Ireland

Phone: +44(0)2828 270 141
Fax: +44(0)2828 275 685
Email: sales@raptorphotonics.com



Visit our web site on: www.raptorphotonics.com

Equipment may require UK Government authorisation for export purposes